

VA-SURF Surface Speaker

The VoiceArrest™ surface sound masking loudspeaker is a 25-volt system speaker designed to generate the optimum masking sound for surface-mounted applications. It is equipped with a 16.5 cm (6.5 in.) driver installed in a sealed enclosure.


The speaker must be installed on the surface of a drywall ceiling or on ceiling tiles through a 19.3 cm (8.6 in.) diameter hole. Four different power taps (1/2, 1, 2, and 4W) controlled with a rotary switch allows quick adjustments of the output level.



Specifications

Power:	10 watts
Line Voltage:	25 V
Sensitivity:	88 dB
Material:	ABS fire proof
Frequency Response:	100–8000 Hz
Connectors:	Spring Loaded Terminals
Driver:	16.5 cm (6.5 in.) fullrange
Color:	White
Weight:	1.8 kg (4 lbs)
Shipping Weight:	2 kg (4.4 lbs)

Dimensions

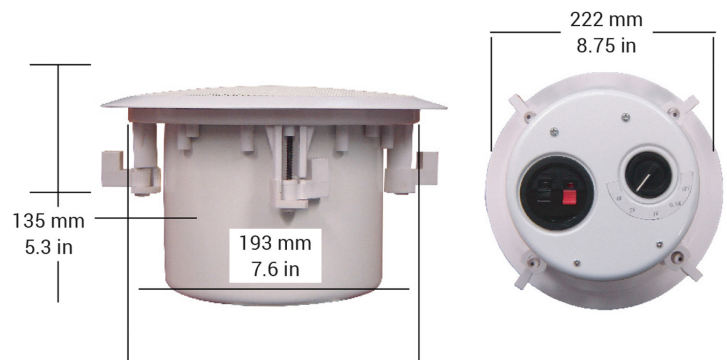

Frequency Response

