

VA-DIRECT

The design is ideal in open structure ceiling configurations since the speaker, terminal and switch will be hidden when the speaker is hung from the deck.

The VoiceArrest VA-DIRECT is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 13cm (5 in.) driver installed in a sealed enclosure.


It is typically installed in the plenum space, suspended between the acoustic tiles and the deck. In the case of an open ceiling, it can be attached to the structure. The SMS-25V loudspeaker can be oriented in any direction. Four different power taps (1/2, 1, 2 and 4W) controlled with a rotary switch allow quick adjustments to the output level. A RoHS compliant version is also available.

Specifications:

| | |
|---------------------|-----------------------------|
| Power: | 10 watts |
| Line Voltage: | 25 V |
| Sensitivity: | 91 dB |
| Material: | ABS fire proof |
| Frequency Response: | 100-10000 Hz |
| Connectors: | 4mm (5/32") Screw terminals |
| Driver: | 13cm (5 in.) fullrange |
| Color: | Black or White |
| Weight: | 1.6 kg (3.5 lbs) |
| Shipping Weight: | 1.8 kg (4 lbs) |



Frequency Response:

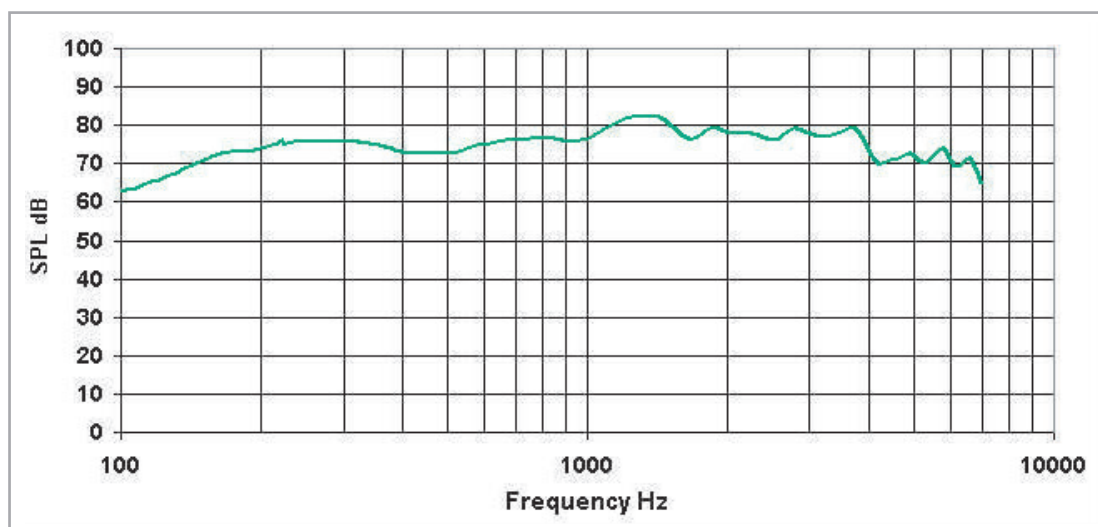

Specifications are subject to change without notice